



HCH-550-1R

Cable hanger for Air Dielectric Cable

Hangers for the installation of Air Dielectric Cable® cables on different supporting profiles.
Cable Clamp and Extended Counterbed hot-galvanized steel
Screw: stainless steel.

FEATURES / BENEFITS



picture shows the 1L4 version for illustration purpose only

Technical features

GENERAL SPECIFICATIONS

| | | |
|------------------------|--|-------------------------------|
| Product Line | | Coaxial Cable Accessories |
| Product Type | | Hanger |
| Hanger Type | | Flat iron 6-12mm (0.24-0.47") |
| Transmission Line Type | | HCA550 |
| Cable Type | | Air Dielectric |

MECHANICAL SPECIFICATIONS

| | | |
|-------------------------------------|--------|--|
| Cable Size | | 5-1/2 |
| Material | | Cable Clamp : hot-dip galvanized Extended Counterbed : hot-dip galvanized Screw: Stainless steel |
| Recommended / Maximum Clamp Spacing | m (ft) | 1 / 2 (3.3 / 6.6) |

TEMPERATURE SPECIFICATIONS

| | | |
|-----------------------|---------|-------------------------|
| Operation Temperature | °C (°F) | -50 to 85 (-58 to 185) |
| Storage Temperature | °C (°F) | -50 to 85 (-58 to 185) |


PACKAGING INFORMATION

| | | |
|------------------|--|---|
| Package Quantity | | 1 |
|------------------|--|---|




HCH-550-1R

Cable hanger for Air Dielectric Cable

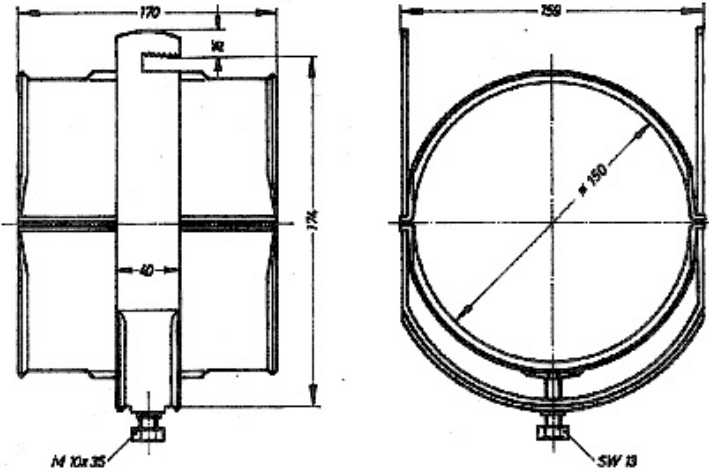


HCH Clamps available for different types of interfaces:



Type C
For anchor bar
(18-22mm slot)



Type L
For angle iron
(in different sizes)



Type R
For flat iron
(6 – 12 mm)

External Document Links

Notes

Hangers for flat iron 6-12 mm (0.24-0.47")